

## DIMENSIONS

MOVISI-SONIC 12 mm (2400g/m<sup>2</sup>)

## COMPOSITION

100% PET (min. 60% post-consumer)

## FIRE TEST

DIN EN 13501-1 B-s1, d0  
 ASTM E-84 Class A

## VOC-EMISSION

CDPH 01350 Pass  
 ISO 16000 EN (CDPH/EHLB/Standard Methode V1.2.)  
 16516

## COLOR FASTENESS


EN ISO 105-B02, A1 Grade 6

## MATERIAL REUTILISATION

MOVISI-SONIC 12 mm 53 plastic bottles/m<sup>2</sup>

## SOUND ABSORPTION

DIN ISO 11654  
 12 mm  $\alpha_w$  0.30 (even better acoustic properties with air between wall and panel, as given with the MOVISI HUSH wall panels.)

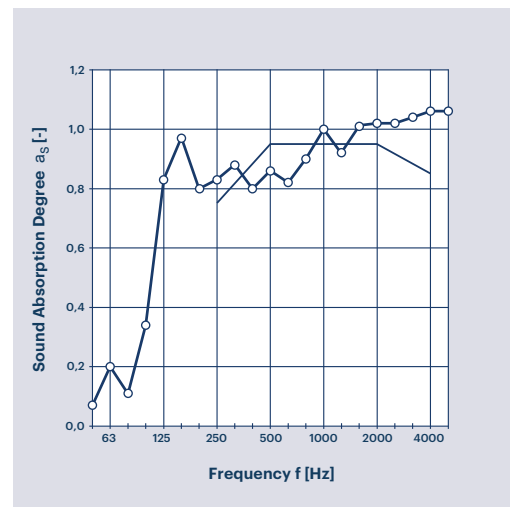

## MICROBIAL RESISTANCE

ASTM G21-15  
 Growth rating: 0 (no growth)  
 MOVISI-SONIC does not provide a breeding ground for mold and mildew.

## ENVIRONMENTAL

Cradle to Cradle Certified™  
 Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit (Low-emitting products)

## SUPPORTED BY

Climate KIC

